



STRONG-POINT **Stainless**™

410 Stainless Steel Self-Drilling Unslotted Indented Hex Washer Head, 5 pt, Passivated and Waxed w/Bonded NEO-EPDM Washer



Material Application: Attaches metal or aluminum to metal or aluminum.

Recess Type:

Unslotted Indented Hex

Head Type:

Hex Washer Head

Where to Buy:

[Q Find a Distributor](#)

+ BULK PRODUCTS

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	Submittal
12-24 x 1-1/4	5	4HA5	3M	42	.125 - .500	9/16" O. D.	View
12-24 x 1-1/2	5	4HA52	2M	33	.125 - .500	9/16" O. D.	View
12-24 x 2	5	4HA53	1.5M	29	.125 - .500	9/16" O. D.	View



Size	Std Part No	Std Qty	Std Part No	Std Qty	Submitter
12-24 x 1-1/4	4HA5V	375	4HA5I	75	View
12-24 x 1-1/2	4HA52V	300	4HA52I	60	View
12-24 x 2	4HA53V	250	4HA53I	50	View

+ SPECIFICATIONS

- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Manufactured to SAE J78 for dimensional specifications

TEST RESULTS

Pullout Values (Avg. Lbs.)									
Fastener		Steel Gauge							
Size	Pt	20	18	16	14	12	1/8	3/16	1/4
12-24	5				951	1486	2269	3593	3882

Shear Values (Avg. Lbs.)									
Fastener		Steel Gauge (Lapped)							
Size	Pt	20	18	16	14	12	1/8	3/16	1/4
12-24	5						2622	2641	2682

The values listed are averages achieved under laboratory conditions and imply no warranty. Appropriate safety factors should be applied to these values for design purposes.

+ FIND A DISTRIBUTOR

Find Locations Near:

Place:

Street:

City:


State:

Zip:

Select a distance:



Search

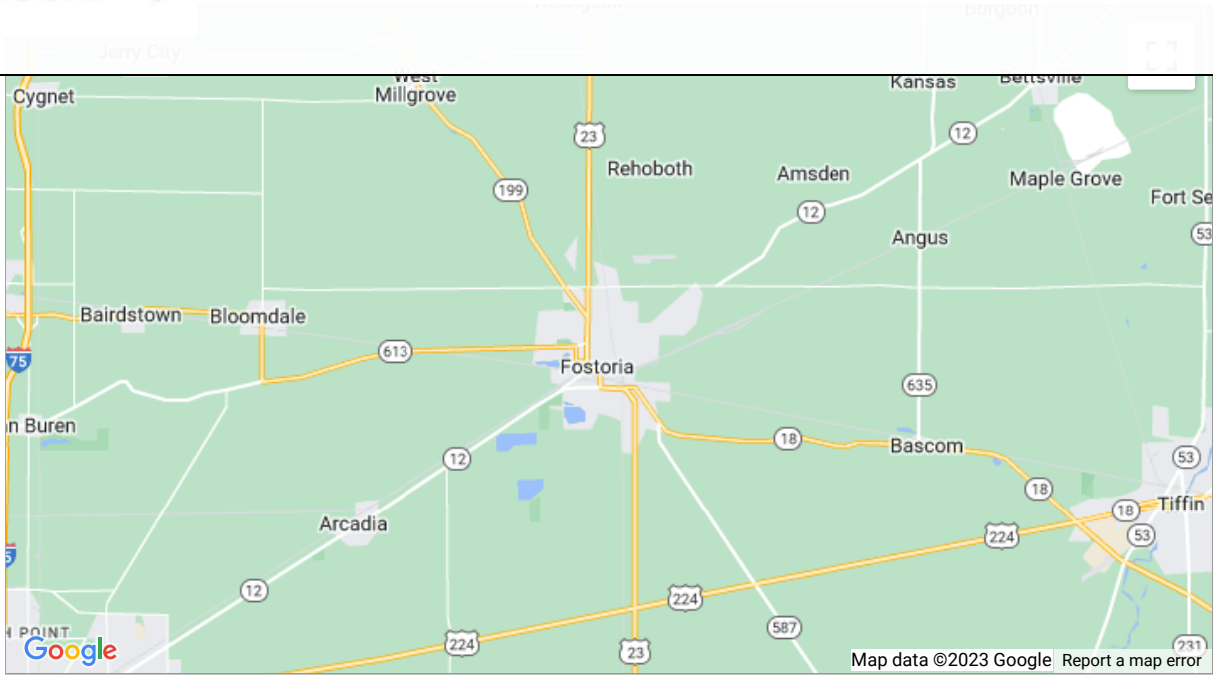

No results found.