



410 Stainless Steel Self-Drilling Unslotted Indented Hex Washer Head, 5 pt, Passivated and Waxed



Material Application: Attaches metal or aluminum to metal or aluminum.

Recess Type:

Unslotted Indented Hex

Head Type:

Hex Washer Head

Coating:

Passivated & Waxed

Where to Buy:

Q Find a Distributor

■ BULK PRODUCTS

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Submittal
12-24 x 1-1/4	5	4H5	3M	35	.125 – .500	<u>View</u>
12-24 x 1-1/2	5	4H52	2M	26	.125 – .500	<u>View</u>
12-24 x 2	5	4H53	1.5M	24	.125 – .500	<u>View</u>



SIZE	SID FAIT NO	SID Qty	IID FAIT NO	TID Qty	Submittal
12-24 x 1-1/4	4H5V	375	4H5I	75	<u>View</u>
12-24 x 1-1/2	4H52V	325	4H52I	65	<u>View</u>
12-24 x 2	4H53V	300	4H53I	60	<u>View</u>

■ SPECIFICATIONS

- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Manufactured to SAE J78 for dimensional specifications

TEST RESULTS


				Pullou	t Values (Av	g. Lbs.)			
Faster	ier					Steel Gauge			
Size	Pt	20	18	16	14	12	1/8	3/16	1/4
12-24	5				951	1486	2269	3593	3882

				Shear V	alues (Avg	. Lbs.)			
Faster	ner				Stee	l Gauge (La	apped)		
Size	Pt	20	18	16	14	12	1/8	3/16	1/4
12-24	5						2622	2641	2682

The values listed are averages achieved under laboratory conditions and imply no warranty. Appropriate safety factors should be applied to these values for design purposes.

FIND A DISTRIBUTOR

Find Locations Near:		
Place:	Street:	City:
State:	Zip:	Select a distance:

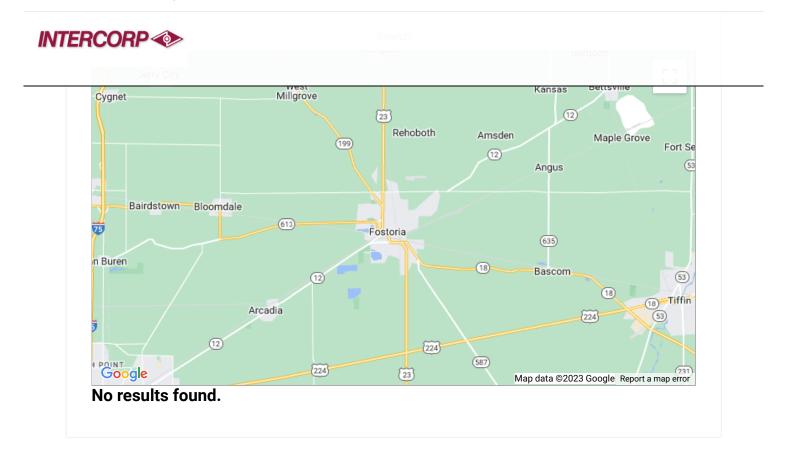

© Copyright - Intercorp | Website By Rockit Creative Solutions

f 👱 in 🚨 🖸